

28 ELECTRICAL SERVICE UNITS
REQUIREMENTS AND ADJUSTMENTS


CONTENTS	PAGE	CONTENTS	PAGE
1. GENERAL	1	Line Test Key Assembly (if Equipped)	
2. REQUIREMENTS AND ADJUST- MENTS	2	Line test key	6
Electrical Motor-control Mechanism (if Equipped)		Relay Motor-control Mechanism (if Equipped)	
Intermediate lever spring tension.	5	Inner contact spring gap	6
Start armature spring tension....	5	Middle contact spring tension	6
Start magnet core	5	Outer contact spring tension	6
Stop armature spring tension	5	Switch position	6
28 G and 28 G-1 Electrical Service Units	2	1. GENERAL	
Slow release relay	2	1.01 This section contains the requirements and adjustments for 28 electrical service units. This section and the section covering teletypewriter general requirements and ad- justments provide the complete information for adjusting the unit.	
28 LB Electrical Service		1.02 The term "send set" is used in the re- quirements and adjusting procedures for the 28 LB electrical service unit to indicate the originating station set.	
Final tests.....	4		
Lower limit timer adjustment (32.6 ms)	4		
Upper limit timer adjustment (73 ms)	4		

2. REQUIREMENTS AND ADJUSTMENTS

2.01 28G and 28G-1 Electrical Service Units

SLOW RELEASE RELAY
REQUIREMENT

THE RELAY SHOULD NOT DE-ENERGIZE WHILE RECEIVING A SERIES OF BLANK CODE COMBINATIONS. THE TIME REQUIRED TO STOP AN ASSOCIATED TRANSMITTER AFTER RECEIPT OF LINE BREAK SIGNAL SHALL NOT EXCEED
MAX. 800 MILLISECONDS.

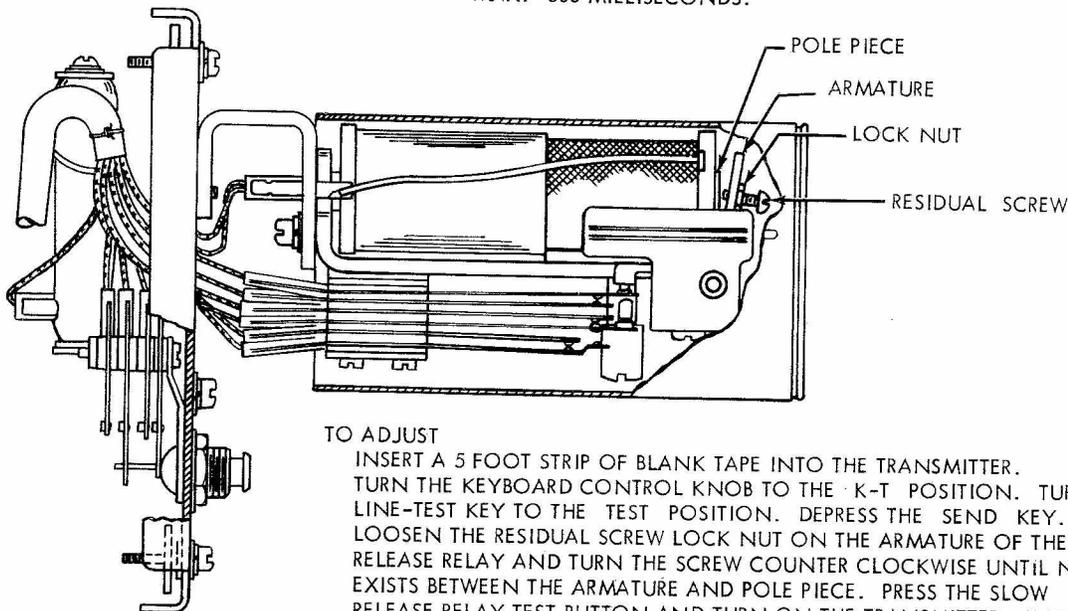

TO ADJUST

INSERT A 5 FOOT STRIP OF BLANK TAPE INTO THE TRANSMITTER. TURN THE KEYBOARD CONTROL KNOB TO THE K-T POSITION. TURN THE LINE-TEST KEY TO THE TEST POSITION. DEPRESS THE SEND KEY. LOOSEN THE RESIDUAL SCREW LOCK NUT ON THE ARMATURE OF THE SLOW RELEASE RELAY AND TURN THE SCREW COUNTER CLOCKWISE UNTIL NO GAP EXISTS BETWEEN THE ARMATURE AND POLE PIECE. PRESS THE SLOW RELEASE RELAY TEST BUTTON AND TURN ON THE TRANSMITTER. WITH THE TAPE RUNNING THROUGH THE TRANSMITTER TURN THE RESIDUAL SCREWS CLOCKWISE UNTIL THE SLOW RELEASE RELAY ARMATURE BEGINS TO VIBRATE. THEN TURN THE RESIDUAL SCREW COUNTER CLOCKWISE SLOWLY UNTIL THE ARMATURE STOPS VIBRATING. TIGHTEN THE LOCK NUT. RERUN THE ENTIRE 5 FOOT STRIP OF TAPE THROUGH THE TRANSMITTER, WHILE THE SLOW RELEASE RELAY TEST KEY IS HELD DEPRESSED; THE SLOW RELEASE RELAY ARMATURE MUST NOT DROP OUT.

INSERT A 5 FOOT STRIP OF LETTERS TAPE INTO THE TRANSMITTER. PLAINLY MARK A ROW OF PERFORATIONS APPROXIMATELY THREE INCHES BACK FROM THE SENSING PINS ON THE TRANSMITTER. HOLD THE SLOW RELEASE RELAY TEST BUTTON DEPRESSED, AND START THE TRANSMITTER. WHEN THE PREVIOUSLY MARKED ROW OF PERFORATIONS REACH THE SENSING PINS, DEPRESS THE LINE-BREAK KEY AND HOLD DEPRESSED UNTIL THE TRANSMITTER STOPS. MARK THE ROW OF PERFORATIONS IMMEDIATELY OVER THE SENSING PINS, REMOVE THE TAPE FROM THE TRANSMITTER AND COUNT THE NUMBER OF PERFORATIONS BETWEEN THE TWO MARKED LINES. THE NUMBER OF PERFORATIONS BETWEEN THESE LINES SHOULD BE NO GREATER THAN,

1. EIGHT FOR 100 WPM OPERATION.
2. SIX FOR 75 WPM OPERATION.
3. FIVE FOR 60 WPM OPERATION.

SHOULD THE NUMBER OF PERFORATIONS BE GREATER THAN THAT SPECIFIED ABOVE, TURN THE RESIDUAL SCREW CLOCKWISE APPROXIMATELY 1/8 TURN AND REPEAT THE ABOVE TEST.

2.02 28 LB Electrical Service Unit:


(A) Requirement for circuit assurance detector: The circuit assurance detector should accept incoming spacing signals from a receive set without setting off an alarm. If the spacing signals fall within the limits of 32.6 to 73.0 ms in length, and are received at least once each 500 ms, the alarm does not operate. The alarm contacts in the dry-reed relay pack (a part of the circuit assurance detector) close to initiate an alarm if the signal to the send set does not comply.

(B) To adjust: The timers on the circuit assurance card are adjusted with off-line signals by using the TP-146439 adapter. The character T or V (32.6 ms marking pulse and 73.0 ms marking pulse respectively) is sent from the 28 LA or 28 LB transmitter-distributor to the MLR relay. Using the TP-146439 adapter, a 32.6 ms spacing pulse, and a 73.0 ms spacing pulse are taken from the normally closed contacts of the MLR relay and fed into the card. The operating point of the lower limit timer is set by using the 32.6 ms spacing

pulse and the operating point of the upper limit timer is set by using the 73.0 ms spacing pulse.

(C) Preliminary Preparation:

- (1) Prepare four test tapes as follows:
 - (a) Three feet punched with BLANKS only.
 - (b) Three feet punched with T only.
 - (c) Three feet punched with M only.
 - (d) Three feet punched with V only.
- (2) Lower the message processing panel of the send set.
 - (a) Block relay CFR operated.
 - (b) Block relay PBRB operated.
 - (c) Set the timer disable switch to its NORMAL position.

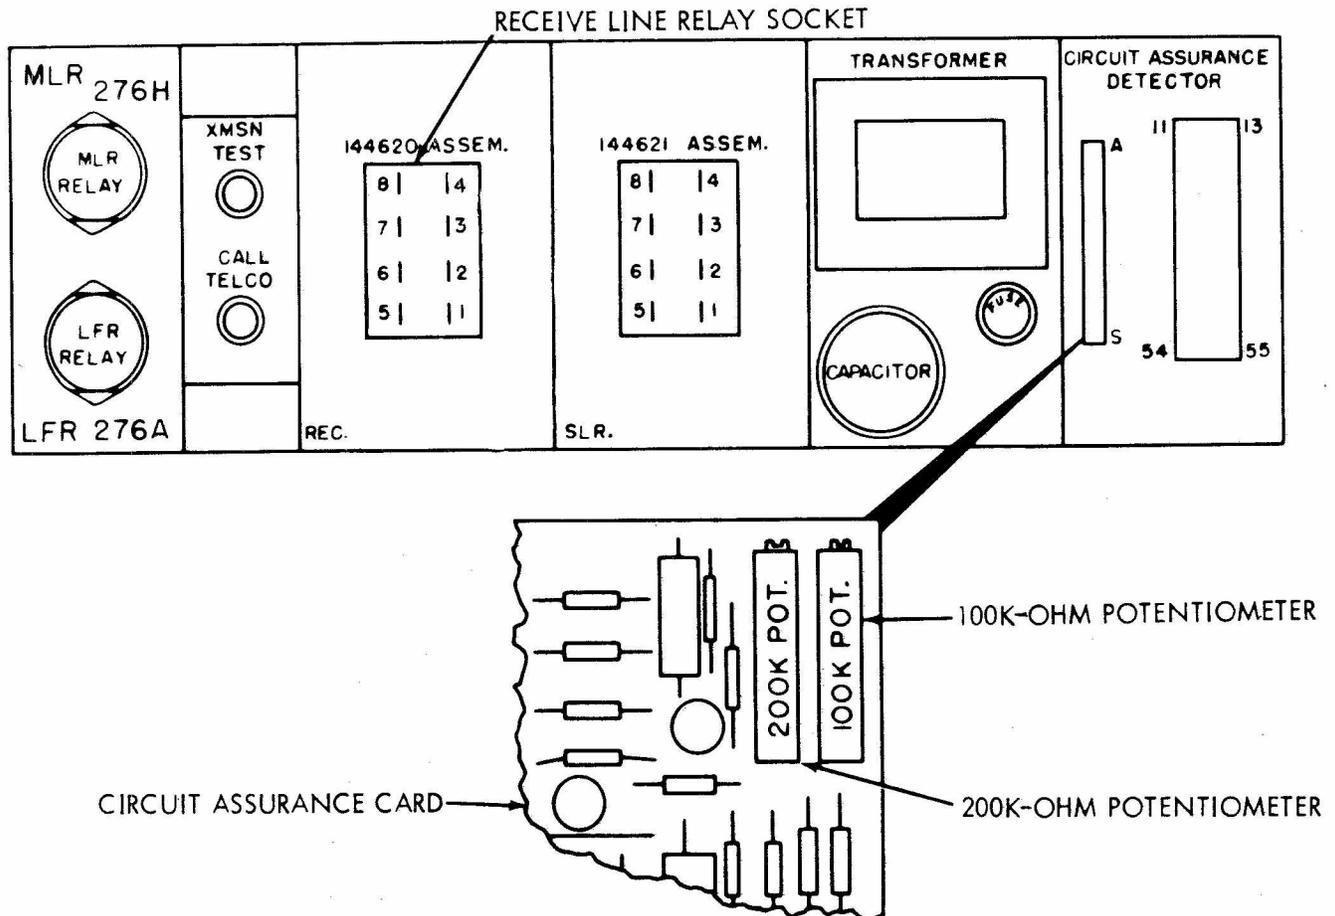

- (3) Lower the alarm panel of the send set.
 - (a) Block relay TCFR in the unoperated position.
- (4) Remove the following from their sockets in the electrical service unit.
 - (a) Relay REC.
 - (b) Relay LFR.
 - (c) Relay MLR.
 - (d) Wave shaping assembly (TP146652).
- (5) Plug relay MLR into the socket provided in the adapter.
- (6) Plug the adapter, with the MLR relay, into the MLR socket of the electrical service unit.
- (7) Plug the adapter test plug into the REC socket of the electrical service unit.

(D) Upper limit timer adjustment (73 ms):

- (1) Set the switch on the adapter to its ADJUST position.
- (2) Place the beginning of the V test tape in the reading head of the TD.
- (3) Set the TD STOP-RUN lever in the STOP position.
- (4) Press the RESET key on the key and lamp assembly to clear all alarms.
- (5) Set the TRANSMITTER selector switch on the key and lamp assembly to its NORMAL position.
- (6) Start the test tape through the TD by operating the STOP-RUN lever to the RUN position.
- (7) With the TD reading the V test tape, rotate the adjusting screw of the 200K potentiometer (rear potentiometer) on the card counterclockwise until CONNECTION LOST alarm operates. Then rotate the adjusting screw clockwise until the CONNECTION LOST alarm fails to operate.

Note: Everytime the alarm operates, the circuit must be reset by pressing the RESET key with the TD lever in the STOP position.

- (8) Very slowly rotate the adjusting screw counterclockwise until the CONNECTION LOST alarm just operates as V test tape is read by TD.

(E) Lower limit timer adjustment (32.6 ms):

- (1) Set the switch on the adapter to ADJUST position.
- (2) Place the beginning of the T test tape in the reading head of the TD.
- (3) Set the TD STOP-RUN lever in the STOP position.
- (4) Press the RESET key on the key and lamp assembly to clear all alarms.
- (5) Set the TRANSMITTER selector switch on the key and lamp assembly to its NORMAL position.
- (6) Start the test tape through the TD by setting the STOP-RUN lever on RUN.
- (7) With the TD reading the T test tape, rotate the adjusting screw of the 100K potentiometer (forward potentiometer) on the card clockwise until the CONNECTION LOST alarm operates. Then rotate the screw counterclockwise until the alarm fails to operate.

Note: Everytime the alarm operates, the circuit must be reset by pressing the RESET key with the TD lever in the STOP position.

- (8) Very slowly rotate the adjusting screw clockwise until the CONNECTION LOST alarm just operates as T test tape is read by TD.



(F) Final tests:

- (1) Set the adapter switch in its TEST position. Press the RESET key on the key and lamp assembly with the TD lever in the stop position to clear any alarms.
- (2) Place the beginning of the BLANK test tape in the reading head of the TD and start the TD reading. CONNECTION LOST alarm should operate. If not, readjust the upper limit timer. To clear an alarm condition depress the RESET key on the key and lamp assembly with the TD lever in the STOP position.


- (3) Replace the BLANK test tape with the T test tape and start the TD. The CONNECTION LOST alarm should fail to operate. If the alarm operates, readjust the upper limit timer as described in (D).
- (4) Replace the T test tape with the M test tape and start the TD. The CONNECTION LOST alarm should fail to operate. If the alarm operates, readjust the lower limit timer as described in (E).

- (5) Replace the M test tape with the V test tape and start the TD. The CONNECTION LOST alarm should operate. If the alarm fails to operate, readjust the lower limit timer as described in (E). Clear the alarm as previously described.
- (6) Restore the equipment to normal by reversing the order of (C), Preliminary Preparation. The timer disable switch should be in NORMAL position.

2.03 Electrical Motor-control Mechanism (if Equipped)

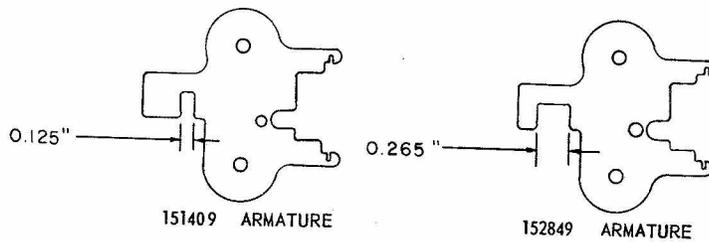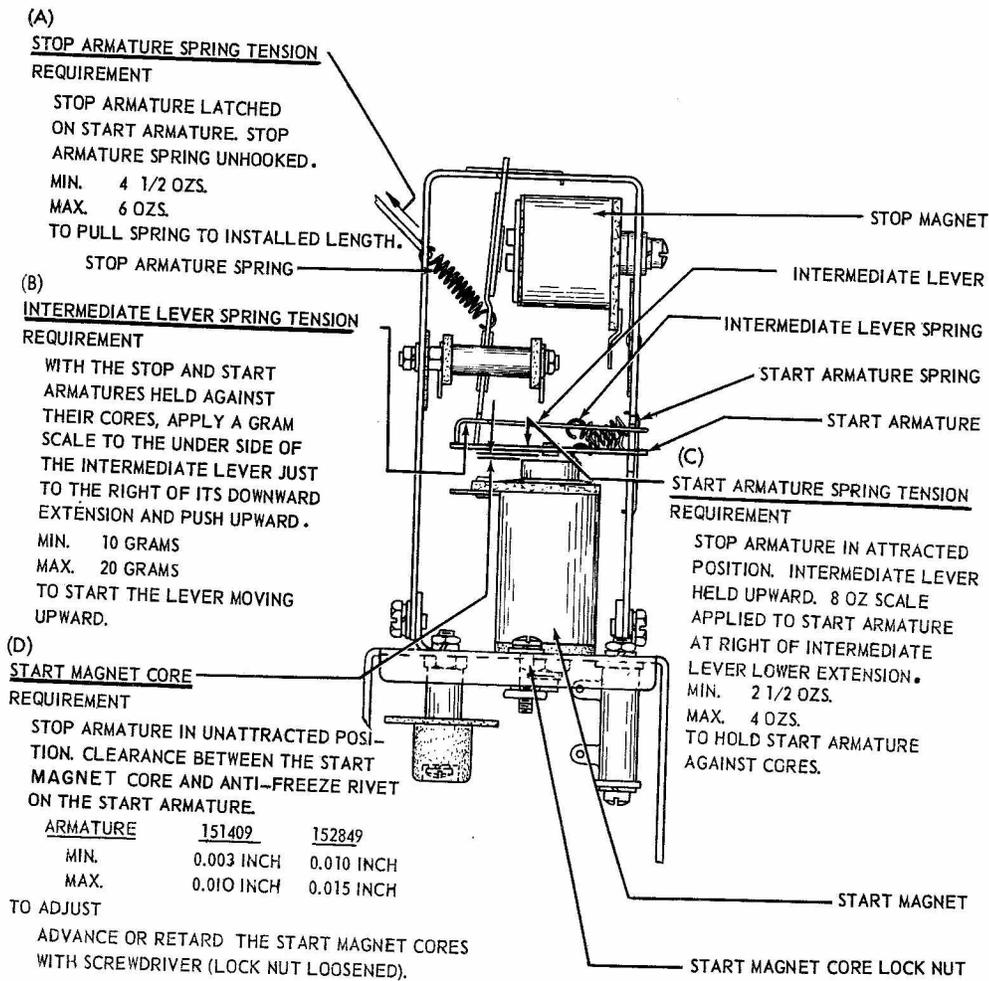

2.04 Relay Motor-control Mechanism (if Equipped)

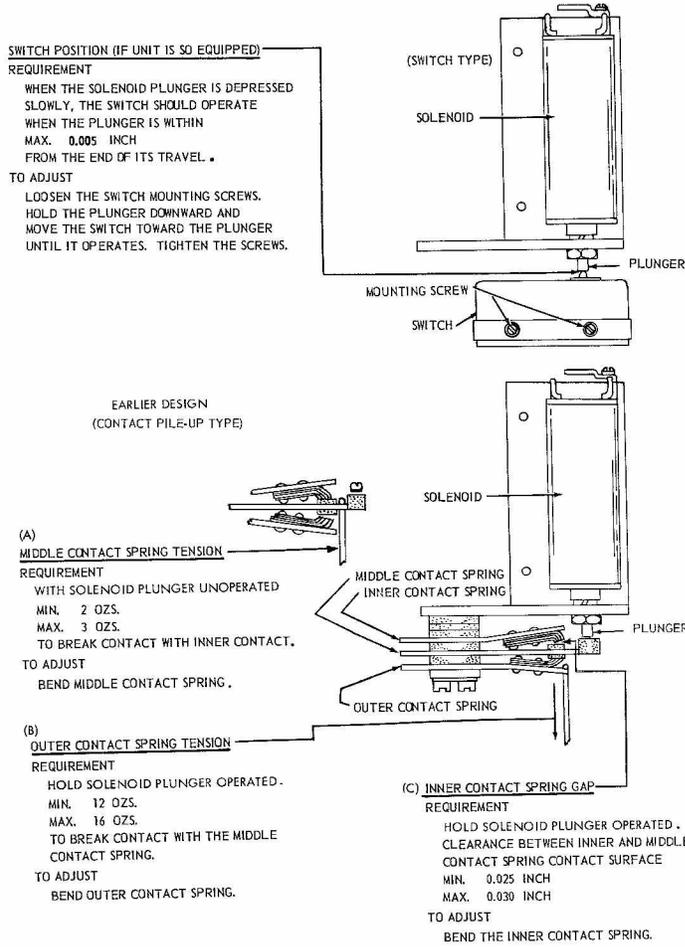

2.05 Line Test Key Assembly (if Equipped)

