

INSTRUCTIONS FOR INSTALLING THE 195528 BLINDING MOD-
IFICATION KIT TO THE 177010 OR 178601 ELECTRONIC SELECTOR-
MAGNET DRIVER

1. GENERAL

a. The 195528 modification kit when installed on a 177010 or 178601 selector-magnet driver provides blinding of the driver when signal line monitoring is not required. For explanation of blinding operation see Specification 50042S.

b. The 195528 modification kit consists of:

2	155750	Tubing	1	195526	Board w/Terminal
1	165449	Resistor 47 ohm, 1W	1	195527	Wire Assembly, Electrical

2. INSTALLATION (Figure 1)


a. Remove driver from set.

b. Install the 195528 modification kit as shown in Figure 1. The 195527 wire assembly is not used with the 178601 driver.

c. Reinstall driver in set.

d. Blinding can be manual or automatic and is optional with the customer. See Figure 1 for typical wiring.

* * *

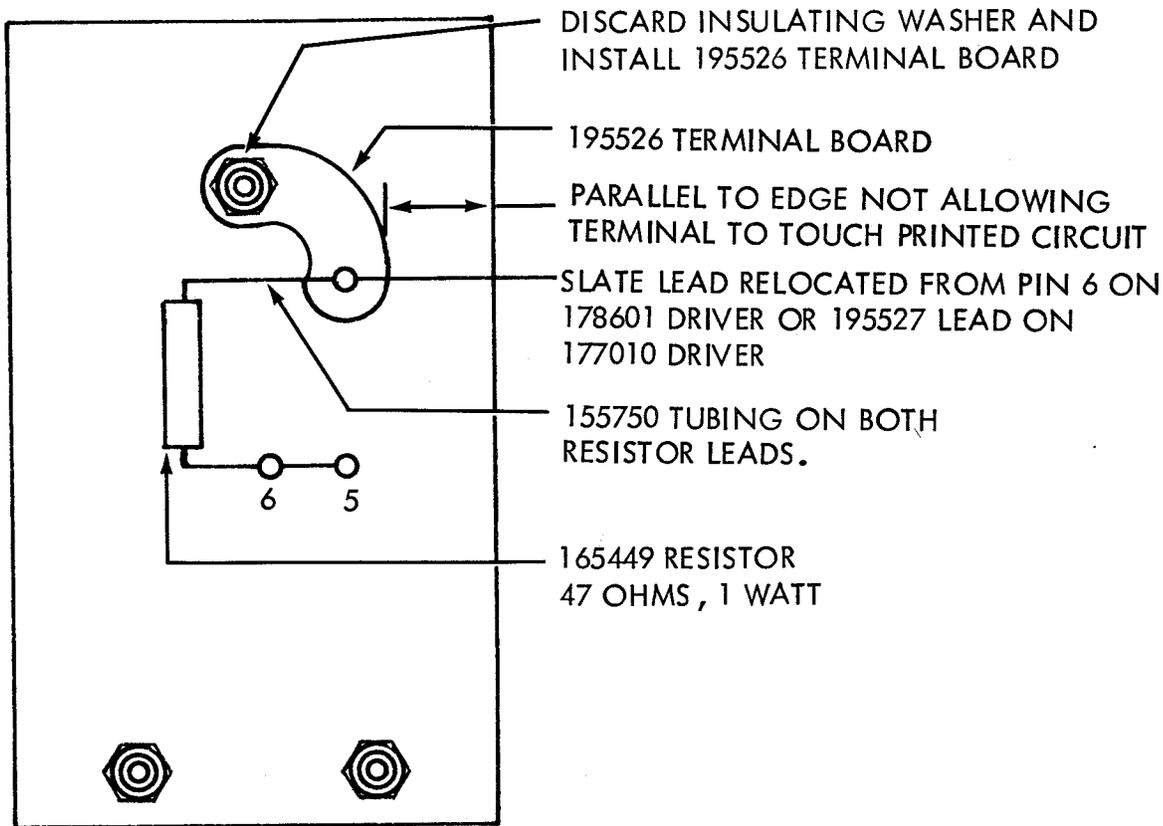

BOTTOM VIEW OF
DRIVER CIRCUIT BOARD

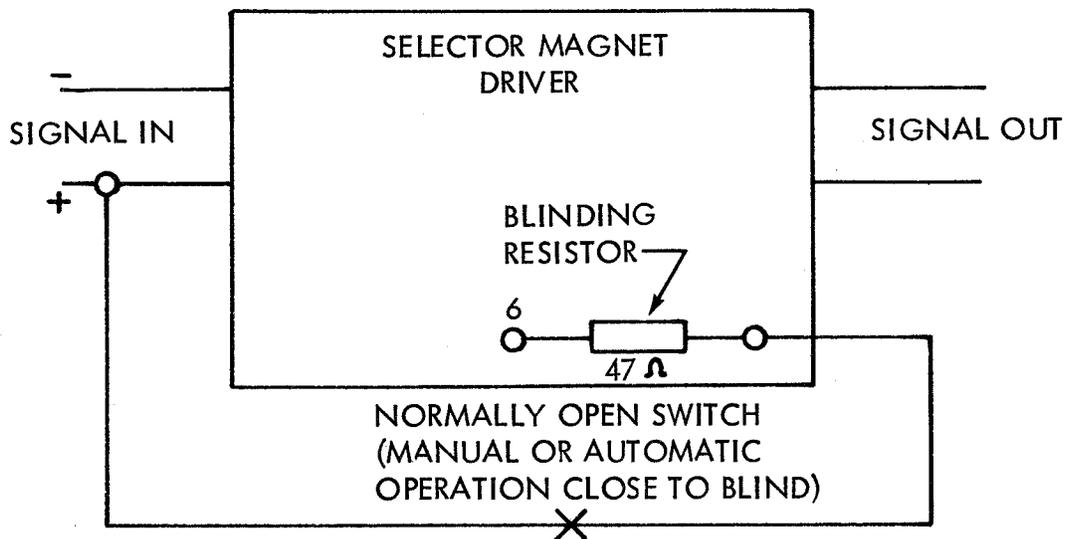


FIGURE 1