
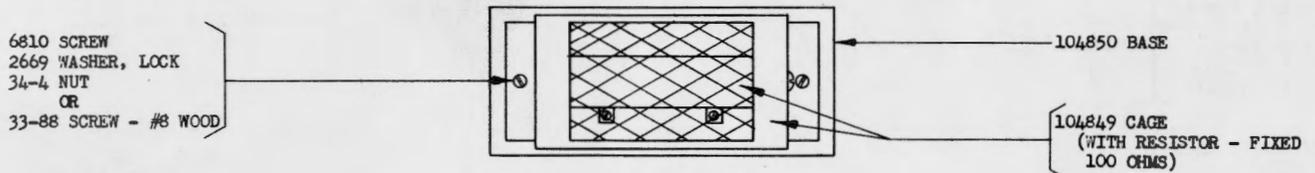


PARTS - PAPER WINDER

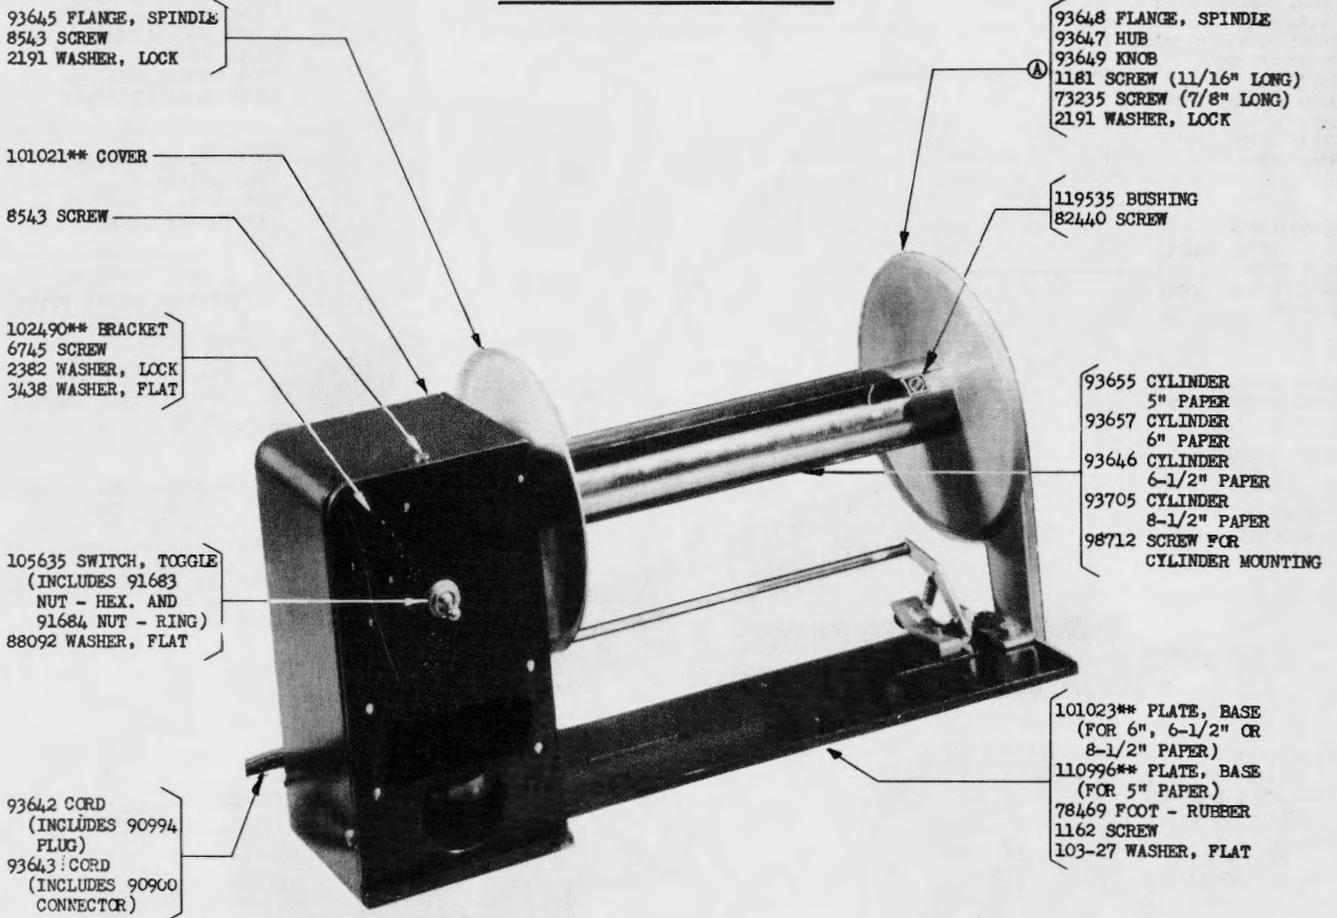

104851 SET OF RESISTOR PARTS
(FURNISHED WITH PW204 AND PW205 FOR
110 VOLT D.C. OR 25 CYCLE A.C. OPERATION)

NOTE:
FOUR 104473 BUSHINGS ARE
FURNISHED WITH PAPER WINDERS
DESIGNED FOR USE WITH NARROW
PAPER SUCH AS PW200, 202, 203,
AND 205. THESE BUSHINGS ARE
TO REPLACE PAPER PRESSURE
ROLLERS ON THE TYPING UNITS
WHERE THE ROLLERS DO NOT BEAR
ON THE PAPER.

NOTE:
THE FOLLOWING PARTS (NOT SHOWN)
ARE INCLUDED TO MOUNT THE PAPER
WINDER ON THE PRINTER COVER:

2201 NUT	(2)
3438 WASHER	(2)
3900 BUSHING	(2)
4814 WASHER, LOCK	(2)
7099 SCREW, THUMB	(2)

Ⓐ SEE PAGE 3 FOR NOTE OF EXPLANATION.

74695 SLEEVE, CLUTCH
76084 WASHER, FELT
74694 ARM
76085 DISK, FRICTION
76086 SPRING
76087 NUT
3340 WASHER, LOCK
3339 NUT
74536 SCREW, SET
93634 WICK

93639 LATCH
(WITH POST)
1196 SCREW
2191 WASHER, LOCK
3598 NUT

33038 SPRING
74554 POST, SPRING

93638 BRACKET

6745 SCREW
3438 WASHER, FLAT
2382 WASHER, LOCK

93644 SHAFT -
WITH HUP
(FOR 6", 6-1/2" OR
8-1/2" PAPER)
93656 SHAFT -
WITH HUB
(FOR 5" PAPER)

89203 ROD, SLACK
(FOR 6", 6-1/2" OR
8-1/2" PAPER)
88886 ROD, SLACK
(FOR 5" PAPER)

88887 LEVER, SLACK ROD
1196 SCREW
2191 WASHER, LOCK
3598 NUT
88891 SPRING

93632 BRACKET
6746 SCREW
2191 WASHER, LOCK

78469 FOOT, RUBBER
33-110 SCREW
103-27 WASHER

76117 TERMINAL BLOCK
(INCLUDES 1028 SCREWS
AND 3650 WASHERS)
74986 SCREW
2191 WASHER, LOCK
88085 CABLE (WD-1543)

93637 PLATE, MOUNTING
78287 COLLAR
1181 SCREW
2191 WASHER, LOCK


77808 RESISTOR - FIXED
(250 OHMS)
1297 SCREW
2191 WASHER, LOCK
3438 WASHER, FLAT
89969 WASHER - BAKELITE
3598 NUT

93635 RESISTOR - FIXED
(250 OHMS)
1297 SCREW
2191 WASHER, LOCK
3438 WASHER, FLAT
89969 WASHER - BAKELITE
3598 NUT

6810 SCREW
3438 WASHER, FLAT
2382 WASHER, LOCK

114684 MOTOR - 115V
A.C./D.C. (MODEL 600-A6)
NEW STYLE - SEE NOTE ON
PAGE 3 FOR OLD STYLE
113911 BRUSH CAP
114685 BRUSH - WITH SPRING
119477 GEAR (60 TEETH)

88039 CLAMP
72508 SCREW
2191 WASHER, LOCK

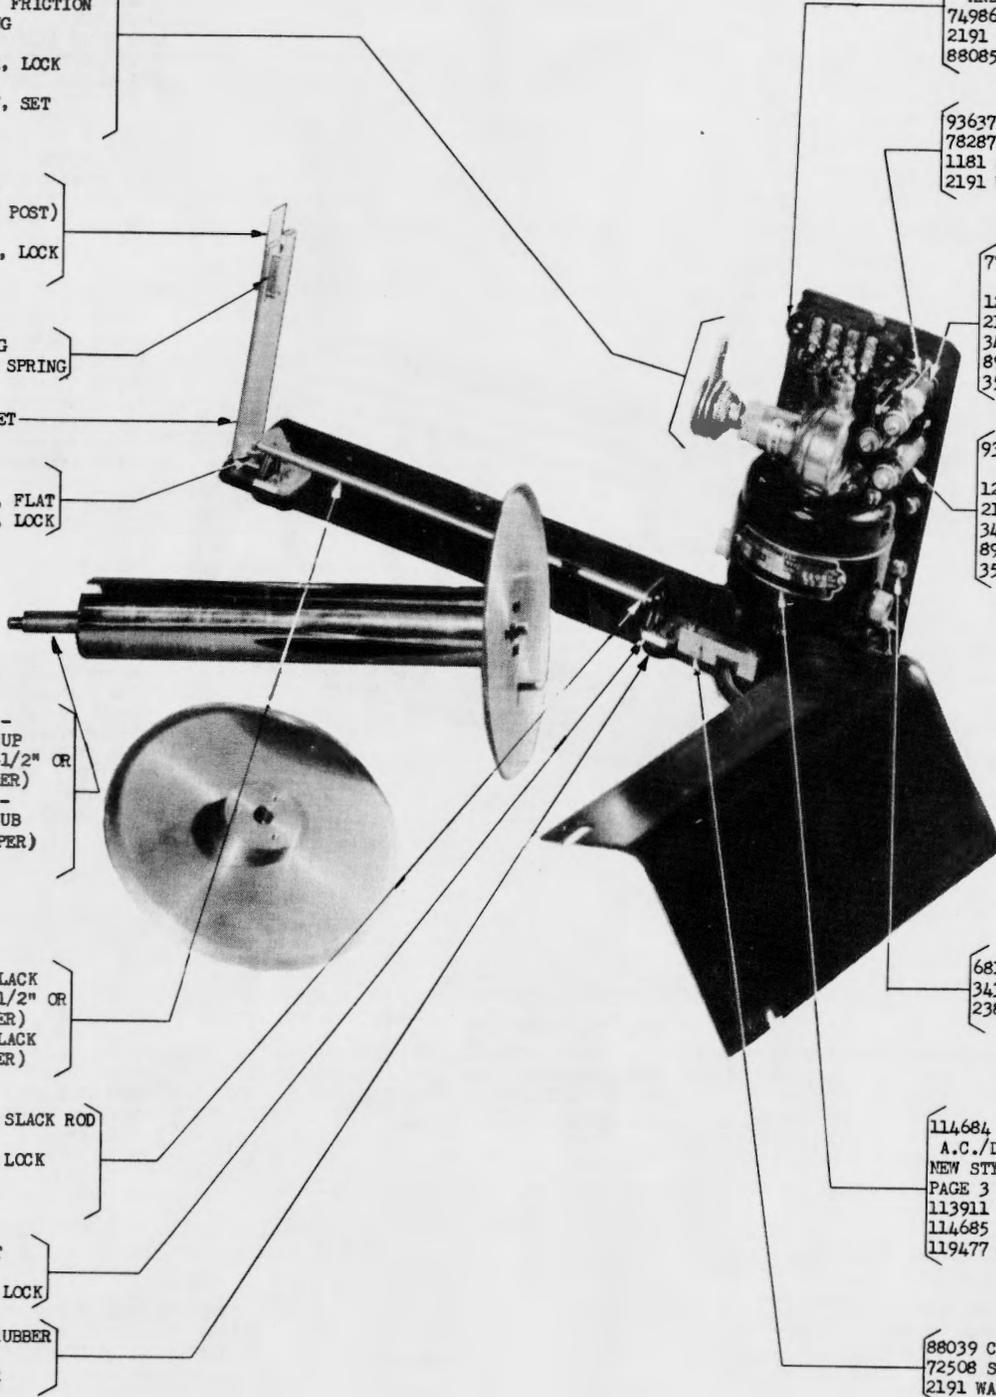

CODE AND PART NUMBER CONVERSION CHART

104851

*NEW CODE	OLD CODE	FINISH	WIDTH OF PAPER USED	*COMPONENTS REQUIRING PAINT FINISH						EQUIPPED WITH 105051 SET OF RESISTOR PARTS
				BASE PLATE		BRACKET		COVER		
				NEW NUMBER	OLD NUMBER	NEW NUMBER	OLD NUMBER	NEW NUMBER	OLD NUMBER	
PW200CA	PW4	WALNUT	4-1/2" TO 6"	101023CA	93631	102490CA	93633	101021CA	93640	-
PW201CA	PW5	WALNUT	6" TO 8-1/2"	101023CA	93631	102490CA	93633	101021CA	93640	-
PW201AA	PW7	BLACK WRINKLE	6" TO 8-1/2"	101023AA	101024	102490AA	102491	101021AA	101022	-
PW202CA	PW6	WALNUT	4-1/2" TO 5"	110996CA	93654	102490CA	93633	101021CA	93640	-
PW202AA	PW10	BLACK WRINKLE	4-1/2" TO 5"	110996AA	110997	102490AA	102491	101021AA	101022	-
PW203CA	PW3	WALNUT	4-1/2" TO 6-1/2"	101023CA	93631	102490CA	93633	101021CA	93640	-
PW204CA	PW8	WALNUT	6" TO 8-1/2"	101023CA	93631	102490CA	93633	101021CA	93640	X
PW205CA	PW9	WALNUT	4-1/2" TO 5"	110996CA	93654	102490CA	93633	101021CA	93640	X

* NEW CODE AND PART NUMBERS THAT REQUIRE A PAINT FINISH HAVE BEEN ASSIGNED A TWO-LETTER SUFFIX WHICH INDICATES THE COLOR AND TEXTURE OF THE PAINT FINISH.
THE FOLLOWING PAINT FINISHES ARE AVAILABLE:

- AA - BLACK WRINKLE
- AB - GRAY GREEN WRINKLE
- AC - LIGHT BROWN WRINKLE
- AD - DARK BROWN WRINKLE
- CA - WALNUT GRAIN

NOTES OF EXPLANATION

PAGE 1

(A) THE REDESIGNED 93649 KNOB WHICH WAS INCREASED IN LENGTH, AND 73235 SCREWS (7/8" LONG), HAVE REPLACED THE OLD STYLE 93649 KNOB AND 1181 SCREWS (11/16" LONG).

PAGE 2

THE 114684 MOTOR (MODEL 600-A6) HAS REPLACED BOTH THE 88062 MOTOR (USED ON PW1 AND PW2) AND 88086 MOTOR (USED ON PW200 TO PW205 INCLUSIVE) AND IS FULLY INTERCHANGEABLE.

THE FOLLOWING COMPONENTS ARE STILL AVAILABLE FOR USE WITH OBSOLETE MOTORS:

- 91291 MOTOR BRUSH
- 91292 MOTOR BRUSH SPRING

PW1 FOR USE WITH 5" PAPER HAS BEEN SUPERSEDED BY PW200CA.
PW2 FOR USE WITH 8-1/2" PAPER HAS BEEN SUPERSEDED BY PW201CA.

ONLY A FEW PARTS FOR THE ABOVE UNITS ARE AVAILABLE. WHEN REPLACEMENT PARTS ARE REQUIRED, THEY SHOULD BE ORDERED BY DESCRIPTION AND, IF AVAILABLE, THEY WILL BE FURNISHED.

Teletype Corporation
Chicago, Illinois, U.S.A.

826EE
Issue 1
January 1954

CORRECTION TO
BULLETIN NO. 1129B, ISSUE 2
PARTS - PAPER WINDER

Page 3

The set of resistor parts identified as 105851 was erroneously listed and should read 104851 set of resistor parts.

* * *