

Teletype Corporation
Skokie, Illinois, U.S.A.

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

Specification 50210S
Issue 1, Page 1
May, 1964

INSTRUCTIONS FOR INSTALLING 194856 MODIFICATION KIT
TO PROVIDE MOUNTING SHELF ON THE MODEL 28 ASR SET
OR LT TABLE FOR THE SINGLE REEL RIM DRIVEN TAPE WINDER

1. GENERAL

a. The 194856 Modification Kit provides a shelf for mounting a TW18 Type Single Reel Rim Driven Winder on the left side of the Model 28 ASR Set or LT200 Type Table. The arrangement on the ASR allows winding of tape from either the punch or transmitter. On the LT Table, this feature allows winding of tape from the self-contained reperforator or typing reperforator (ROTR Set).

b. The Modification Kit consists of:

4	2669	Washer, Lock	3	124148	Washer, Flat
3	5599	Nut	3	125002	Screw
3	3646	Washer, Lock	4	156764	Post
4	74807	Nut	1	176498	Shelf, Mounting
4	119262	Washer, Flat			

c. For parts ordering information refer to Teletype Model 28 Typing Reperforator and Tape Printer Sets Parts Bulletin 1167B and to Automatic Send-Receive Set (ASR) Parts Bulletin 1169B.

2. INSTALLATION

a. Assemble and mount the 194856 Modification Kit containing a shelf for the TW18 Type Tape Winder as shown in Figures 1 and 2.

b. With the Model 28 ASR Set, place the TW18 Tape Winder over the studs and route the tape according to the diagram on the tape winder. (See Figure 1)

c. With the LT Table, position the punch to the front left side of the table top providing proper tape routing from punch to winder. (See Figure 2)

3. ADJUSTMENTS AND LUBRICATION

a. The 194856 Modification Kit has no adjustments or lubrication procedure.


b. For adjustments and lubrication procedure of related equipment see Teletype Model 28 Bulletins 247B and 250B.

*

*

*

TO PROVIDE MOUNTING SHELF ON THE ASR SET FOR THE SINGLE REEL RIM DRIVEN TAPE WINDER.

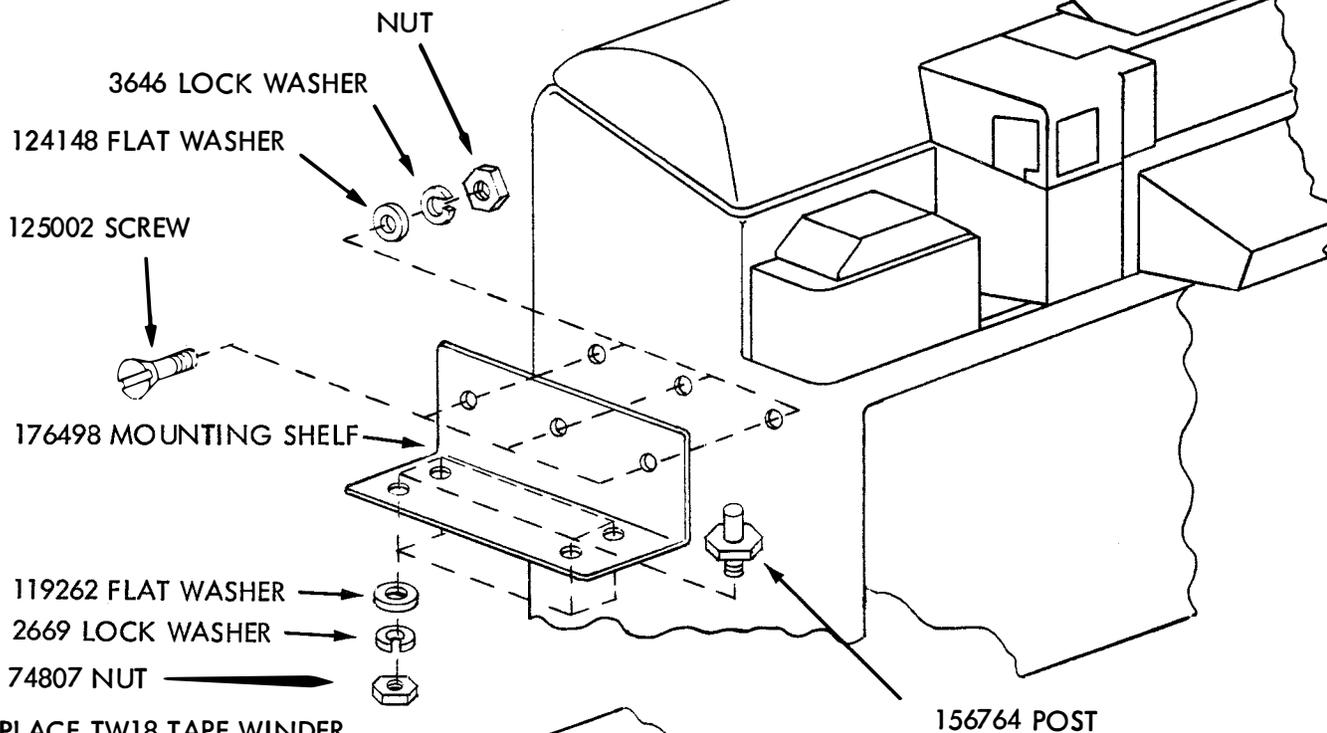

PLACE TW18 TAPE WINDER WITH ENCLOSURE OVER 156764 POSTS

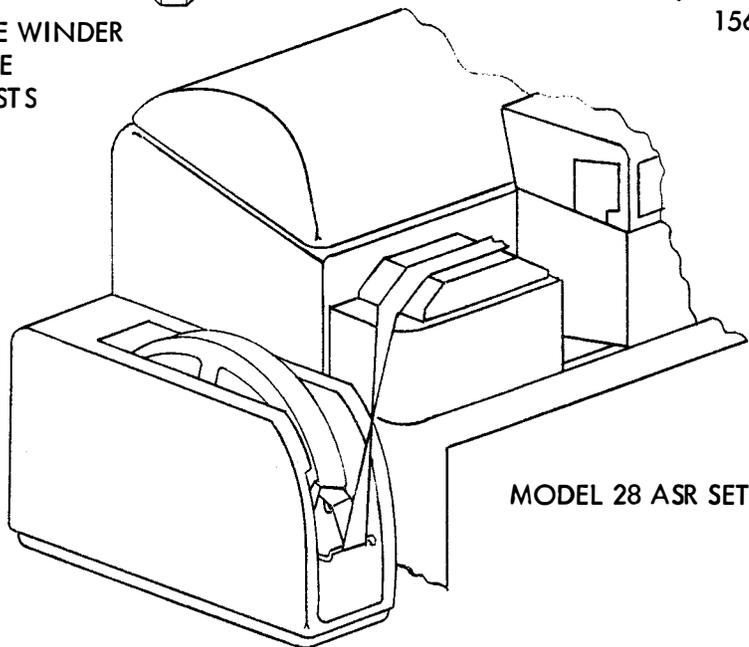


FIGURE 1

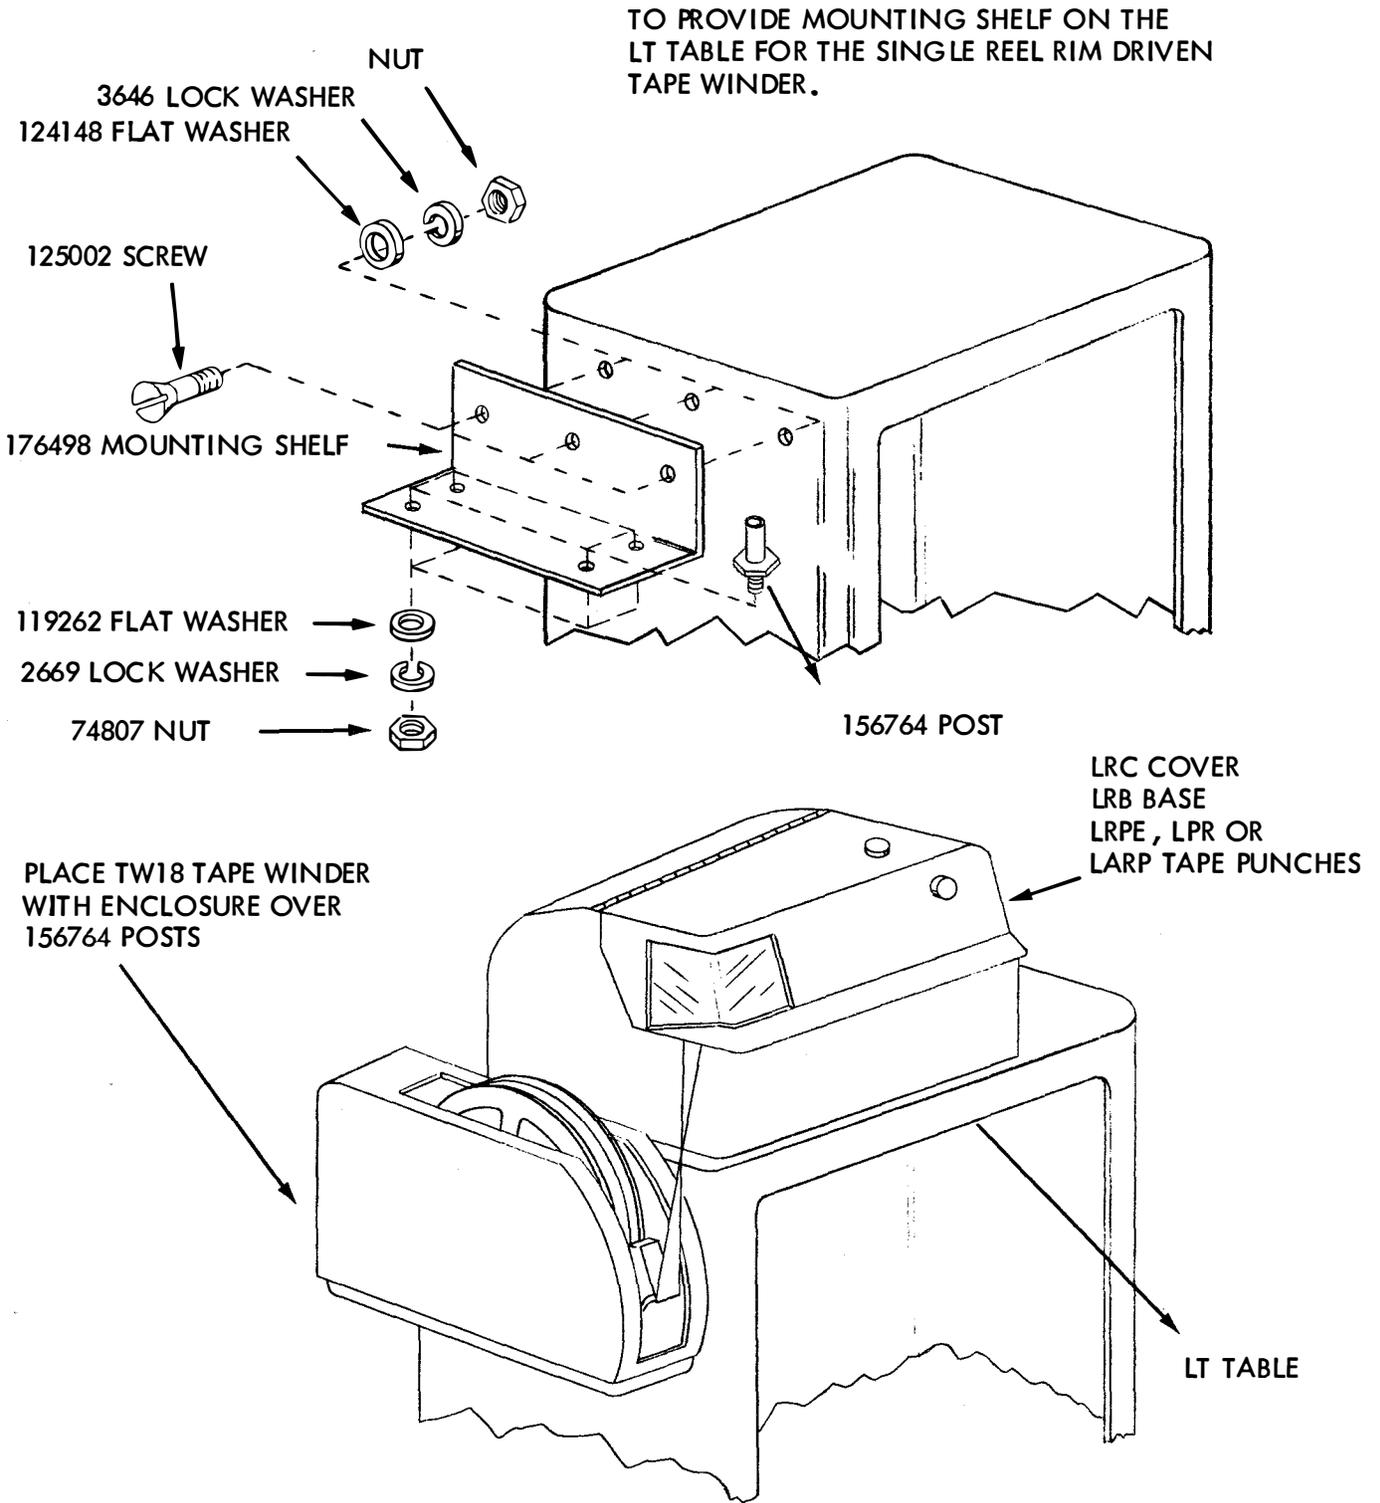


FIGURE 2

Teletype Corporation
Skokie, Illinois, U.S.A.

Addendum to Specification 50210S
Issue 1, Page 1, Dated
May, 1964

ADDENDUM TO SPECIFICATION 50210S, ISSUE 1, DATED
MAY, 1964 COVERING THE 194856 MODIFICATION KIT

1. Make the following change in the Specification:
 - a. On Page 1, change the Issue number from Issue 1 to Issue 2.

* * *

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

Printed in U.S.A.